


Storm Series of Fans

55" Fiberglass Exhaust Fans

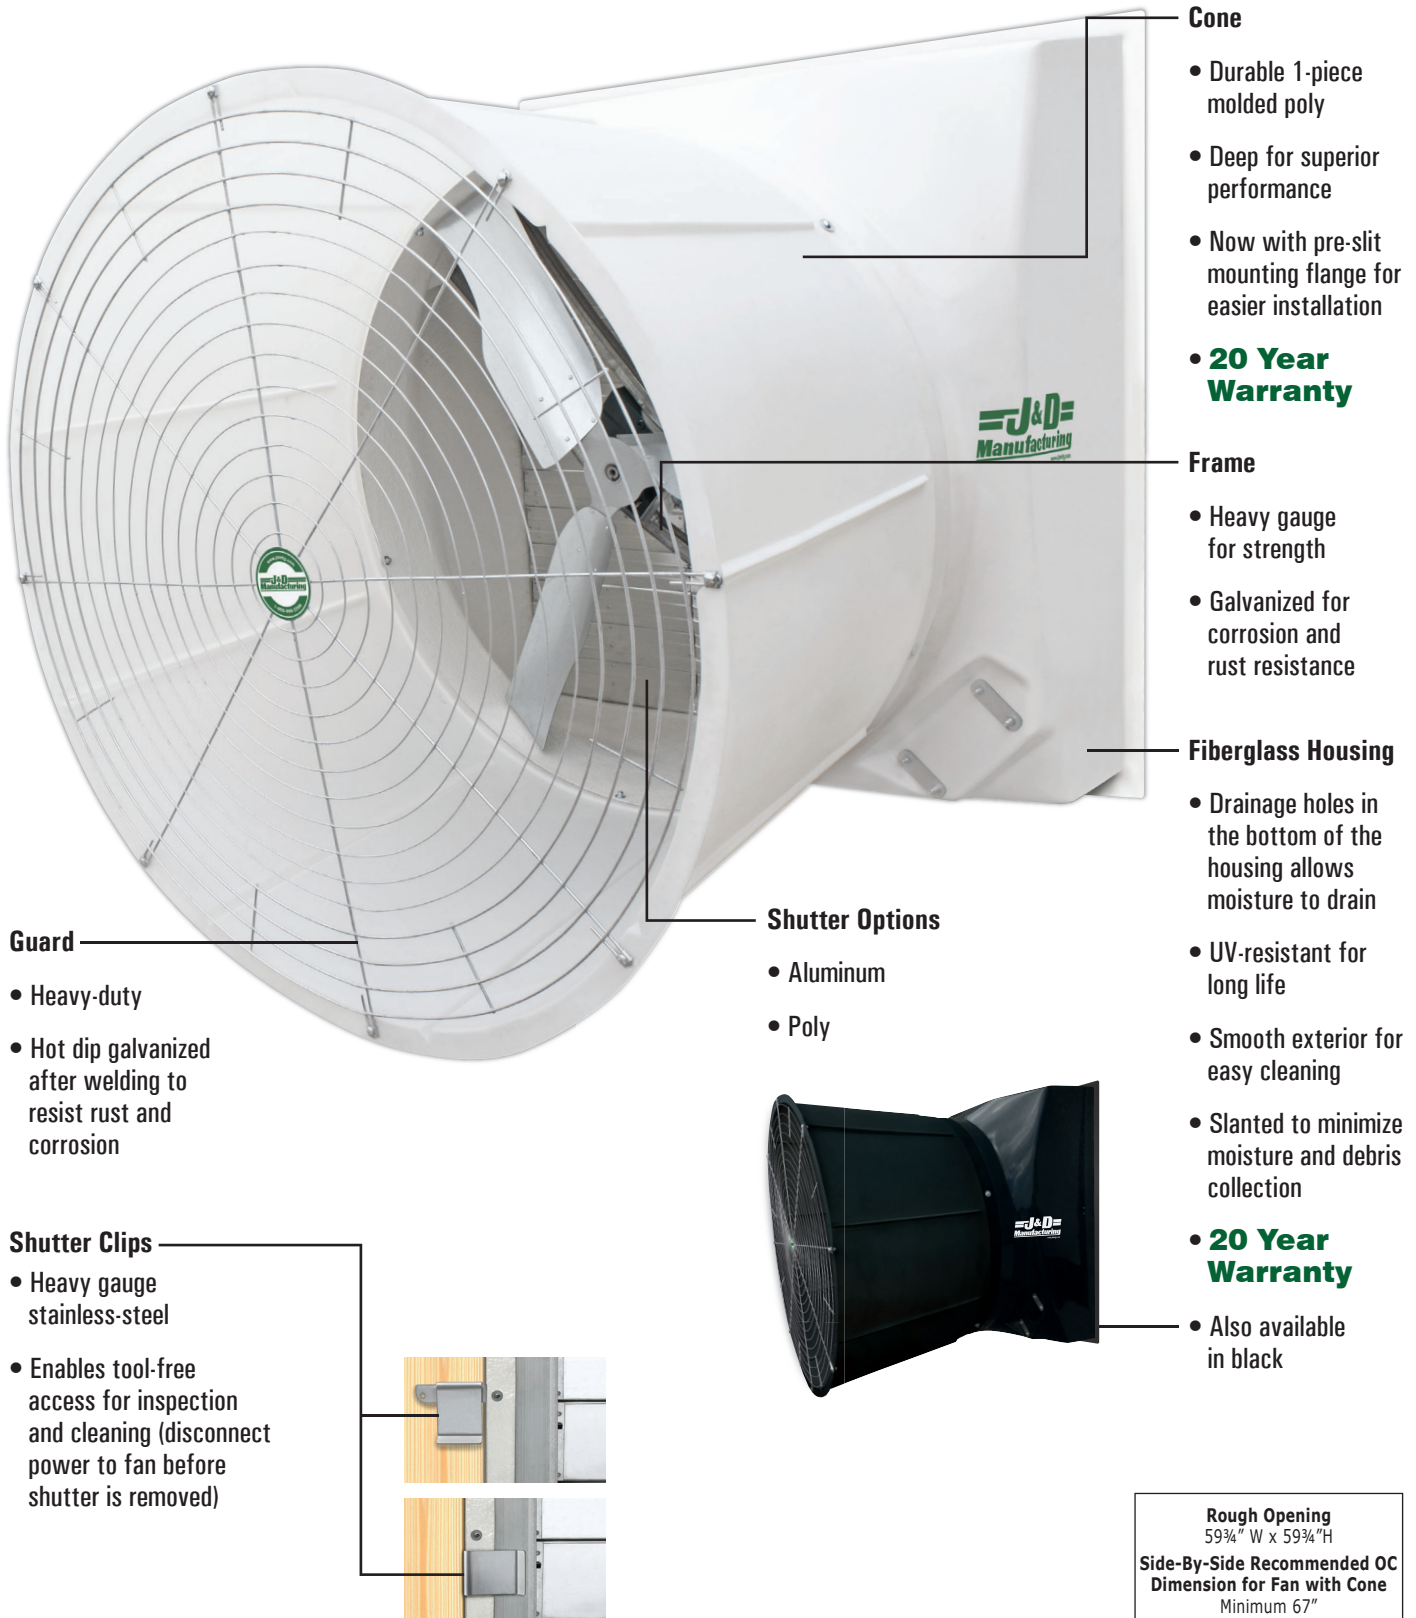

Cone

- Durable 1-piece molded poly
- Deep for superior performance
- Now with pre-slit mounting flange for easier installation
- **20 Year Warranty**

Frame

- Heavy gauge for strength
- Galvanized for corrosion and rust resistance

Fiberglass Housing

- Drainage holes in the bottom of the housing allows moisture to drain
- UV-resistant for long life
- Smooth exterior for easy cleaning
- Slanted to minimize moisture and debris collection

• **20 Year Warranty**

- Also available in black

Guard

- Heavy-duty
- Hot dip galvanized after welding to resist rust and corrosion

Shutter Options

- Aluminum
- Poly

Shutter Clips

- Heavy gauge stainless-steel
- Enables tool-free access for inspection and cleaning (disconnect power to fan before shutter is removed)



Rough Opening
59 3/4" W x 59 3/4" H
Side-By-Side Recommended OC
Dimension for Fan with Cone
Minimum 67"

⚠ WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Storm

Belt Drive 55" Fiberglass Exhaust Fan

EXHAUST FANS



Motor


- High-efficiency
- Totally enclosed
- 1 HP, 1 1/2 HP, or 2 HP
- Covered by a **2 Year Warranty**

Belt Tensioner

- Automotive style
- Toolless belt changing

Prop Options

- High-performance cast-aluminum prop with **Lifetime Warranty**
- Galvanized prop with **1 Year Warranty**

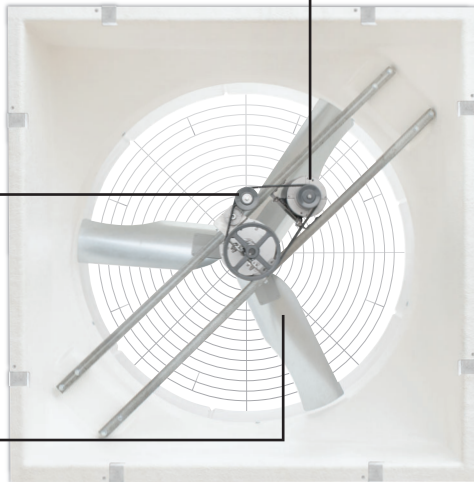

Shown with shutter removed
(Never permit power to fan with shutter removed)

Shaft Bearings

- Pre-lubricated
- Featuring an eccentric locking collar with set screw
- Permanently sealed and rubber mounted for smooth operation
- Covered by a **3 Year Warranty**



| Part # | Sz | Spd | @ 0.10" SP | | | Drive | Prop |
|-------------------------|-----|-----|---------------|-------------|-------------|-------|-------|
| | | | CFM | Watt | FEI | | |
| Single Phase | | | | | | | |
| Aluminum Shutter | | | | | | | |
| VSA55G3C11E-SL | 55" | 1 | 21,189 | 23.4 | 2.78 | Belt | 3-Glv |
| VSA55A3C151-SL | 55" | 1 | 24,056 | 19.0 | 2.25 | Belt | 3-CA |
| VSA55G3C151-SL | 55" | 1 | 23,985 | 21.8 | 2.58 | Belt | 3-Glv |
| * VSA55A3C21-SL | 55" | 1 | 28,347 | 13.8 | 1.62 | Belt | 3-CA |
| VSA55G3C21-SL | 55" | 1 | 27,546 | 16.1 | 1.89 | Belt | 3-Glv |
| Poly Shutter | | | | | | | |
| VSP55G3C11E-SL | 55" | 1 | 19,799 | 21.3 | 2.58 | Belt | 3-Glv |
| VSP55A3C151-SL | 55" | 1 | 22,348 | 17.6 | 2.10 | Belt | 3-CA |
| VSP55G3C151-SL | 55" | 1 | 22,903 | 20.4 | 2.42 | Belt | 3-Glv |
| VSP55A3C21-SL | 55" | 1 | 27,087 | 13.2 | 1.55 | Belt | 3-CA |
| VSP55G3C21-SL | 55" | 1 | 26,601 | 15.2 | 1.79 | Belt | 3-Glv |
| Three Phase | | | | | | | |
| Aluminum Shutter | | | | | | | |
| VSA55A3C153-SL | 55" | 1 | 23,774 | 19.3 | 2.30 | Belt | 3-CA |
| VSA55G3C153E-SL | 55" | 1 | 23,844 | 22.0 | 2.62 | Belt | 3-Glv |
| VSA55A3C23-SL | 55" | 1 | 31,060 | 13.6 | 1.59 | Belt | 3-CA |
| VSA55A3C23E-SL | 55" | 1 | 28,515 | 15.4 | 1.80 | Belt | 3-CA |
| VSA55G3C23-SL | 55" | 1 | 31,402 | 16.0 | 1.86 | Belt | 3-Glv |
| VSA55G3C23E-SL | 55" | 1 | 26,411 | 20.6 | 2.43 | Belt | 3-Glv |
| Poly Shutter | | | | | | | |
| VSP55A3C153-SL | 55" | 1 | 22,624 | 17.9 | 2.14 | Belt | 3-CA |
| VSP55G3C153E-SL | 55" | 1 | 22,746 | 20.5 | 2.46 | Belt | 3-Glv |
| VSP55A3C23-SL | 55" | 1 | 30,058 | 12.8 | 1.51 | Belt | 3-CA |
| VSP55A3C23E-SL | 55" | 1 | 27,250 | 14.7 | 1.74 | Belt | 3-CA |
| VSP55G3C23-SL | 55" | 1 | 30,471 | 15.1 | 1.76 | Belt | 3-Glv |
| VSP55G3C23E-SL | 55" | 1 | 25,475 | 19.5 | 2.29 | Belt | 3-Glv |

Non Slant Wall Versions

Remove "-SL" at end of part # - Example: VSSP55A3C23

Black Versions (requires extended lead time)

Add "-B" to end of part # - Example: VSSP55A3C23-SL-B

* Experts choice

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA 210-07 standard.

⚠ WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.